




radiant Collection
radiant® Multi-Location Master Dimmer, White
Part No. HCL453PMMW

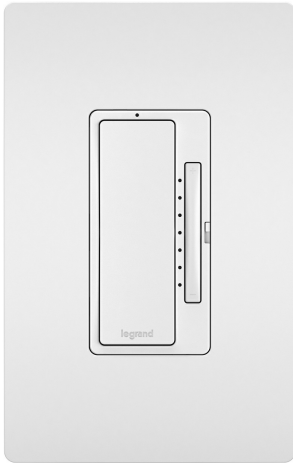

Allows precise dimming control of a light or fixture. Pair with a Multi-Location Remote Dimmer to control the same fixture from another spot in the room. Part of the radiant® Collection, it also features clean lines and smooth control for a sophisticated touch. Made exclusively for use with screwless Wall Plates from the radiant® Collection, sold separately.

Features & Benefits

For use with most incandescent, CFL/LED (with the exception of 0 - 10v options) and MLV dimmable bulbs. Installs easily with 3-way wiring for multi-location dimming (use with up to nine remote dimmers).

Low-profile paddle switch offers smoother On/Off control, while a separate, ergonomic slider allows you to adjust light levels with precision.

Constant memory features returns lights to their previous level after a power failure or outage.

Features durable, high-impact resistant thermoplastic construction.

Complete the look with a sleek, screwless radiant® Wall Plate, and coordinate with other designer switches and outlets available from the radiant® Collection.

Can also be used in single-pole applications for solitary control.

Locator light illuminates when switch is off, emitting a soft glow to help you find it in the dark.

No derating* required in multi-gang applications.
*Reducing the maximum wattage a dimmer can handle. This is sometimes required for multi-gang applications.

More color options available to fit any style, including finishes to match current hardware and lighting trends.

Specifications

General Info

Product Line	Pass & Seymour	Color	White
Country Of Origin	China	Features	Indicator Lights
Switch Type	Paddle	Number of Switches	1

Application Sector	Residential	Standard	CSA Listed, cULus, UL Listed
--------------------	-------------	----------	------------------------------

Warranty Type	Limited Lifetime Warranty	Type	Dimmer
---------------	---------------------------	------	--------

Dimensions

Product Width US	2.5 in	Product Depth US	1.25 in
------------------	--------	------------------	---------

Product Height US	4.25 in
-------------------	---------

Listing Agencies / 3rd Party Agencies

cULus Listed	Yes
--------------	-----

Technical Information

Frequency Rating	120VAC 60 Hz	Connection	Screw Terminals
------------------	--------------	------------	-----------------

Number of Gangs	1	Amperage	15 A
-----------------	---	----------	------

Bulb Compatibility	CFL, Incandescent, LED	Number of Poles	3-Way, Multi-Location, Single Pole
--------------------	------------------------	-----------------	------------------------------------

Wattage	700 W	Mounting Type	Box
---------	-------	---------------	-----

Voltage	120.0 V	Load	Universal
---------	---------	------	-----------

Environmental Conditions	Humidity: Less than 95% non condensing
--------------------------	----------------------------------------
