




radiant Collection  
radiant® Two Single-Pole Switches, White  
Part No. RCD11W

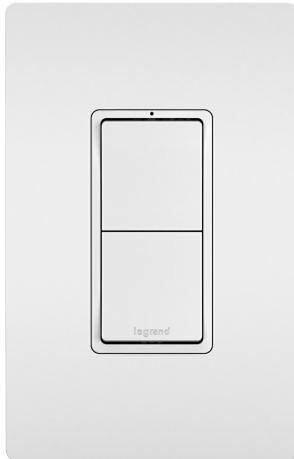

Control two separate lights or devices from a single location with this combination switch. Designed to emulate the sleek lines of the collection's paddle switches, it delivers flexible, space-saving control with the sophisticated look of radiant. Made exclusively for use with screwless Wall Plates from the radiant® Collection, sold separately.

## Features & Benefits

Offers installation flexibility with space-saving style, as part of the extensive offering from the radiant® Collection.

Features durable, high-impact resistant thermoplastic construction.

Designed to install easily with a narrower back body and captivated mounting screws.

Patented Snap-In Light Module (sold separately) transforms a combination switch into an illuminated switch in seconds.

More color options available to fit any style, including finishes to match current hardware and lighting trends.

Complete the look with a sleek, screwless radiant® Wall Plate, and coordinate with other designer switches and outlets available from the radiant® Collection.

## Specifications

### General Info

Product Line	Pass & Seymour	Replaced by Part Number	
Color	White	Country Of Origin	China
Features	Combination, Locator Light	Switch Type	Push
Number of Switches	2	Application Sector	Residential
Standard	cULus, UL Listed	Warranty Type	1-Year Limited Warranty
Type	Switch		

### Dimensions

---

Product Width US	1.29 in	Product Depth US	1.59 in
------------------	---------	------------------	---------

---

Product Height US	3.81 in
-------------------	---------

---

### Listing Agencies / 3rd Party Agencies

---

cULus Listed	Yes
--------------	-----

---

### Technical Information

---

Contact Configuration	15A	Operating Cycles	50000
-----------------------	-----	------------------	-------

---

Contact Rating	120	Number of Gangs	1
----------------	-----	-----------------	---

---

Amperage	15 A	Number of Poles	Single Pole
----------	------	-----------------	-------------

---

Mounting Type	Box	Voltage	120.0 V
---------------	-----	---------	---------

---

Environmental Conditions	UL94 V2
--------------------------	---------

---